




How to recalibrate a newer controller

STUDIO AUTO CLAM SENIOR/ JUNIOR PRESS

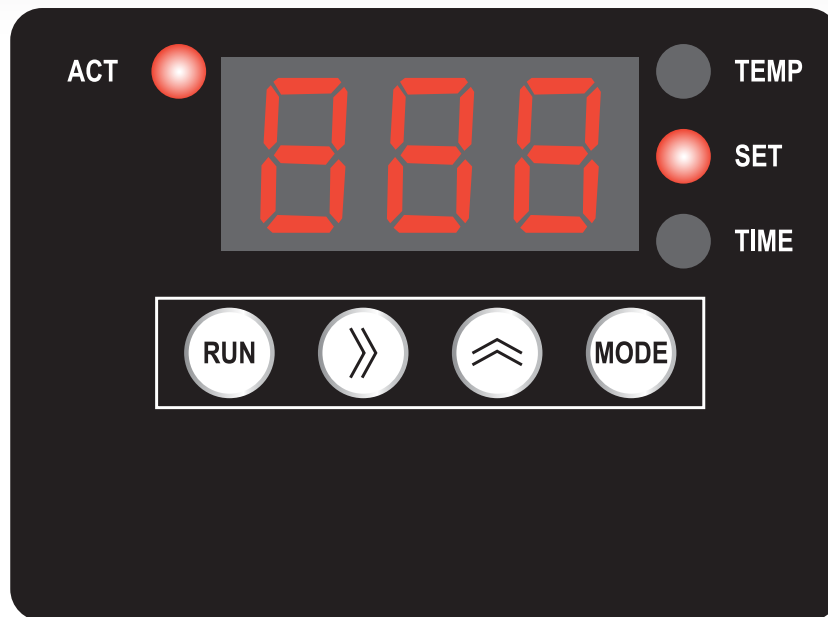

1. Press the » and ⤴ up arrow buttons alternately to the count of 5.
2. “ADJ” will appear on the display and flash once; it will then display the temperature to be changed.
3. To change the temperature press either the ⤴ or » buttons. Once the temperature has been revised the display will flash 5
4. times and then show the temperature.
5. When the set time has been reached, the display will flash. Press the mode button 3 times to stop the flashing, after this the press is ready to use.