




How to change a reed switch

OMEGA SERIES 1000-1001

Replacement/ removal of a reed switch

- N.B.** Before undertaking any work, switch off the power supply to the machine and unplug the machine from the electricity supply
1. Using a hex wrench remove reed switch from piston arm assembly (pic 1) and by cutting cable ties securing wires to arm
 2. Remove the six screws securing the rear box lid and lift off from rear box (pic 2)
 3. Using a small flat bladed screwdriver remove electrical connections from connection block (pic 3) taking note of all connections for future reference when reinstalling
 4. Unthread reed switch wiring, taking note of cable wiring layout for future reference when reinstalling
 5. Remove boot lace ferrules from reed switch wire ends (pic 4)

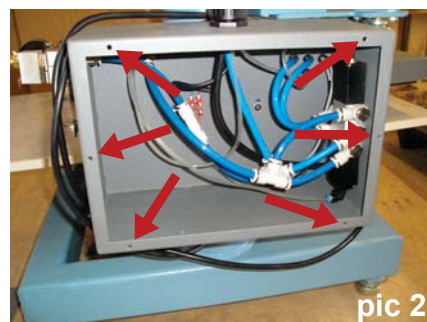

Re-installation of replacement reed switch

1. Installation is a reversal of removal
- N.B.** Before installing reed switch wire ends into connection block please fit new boot lace ferrules supplied.

